



The Veko Focus Spot is ideal for accent lighting in retail and office projects. The spotlight is fully integrated in the light line and is a nice addition to the Duncan retail line.

The Veko Focus Spot has an appearance of 36 degrees. This makes this spot suitable for focusing attention on one specific product. It is often used as a single spotlight that lights up directly.




### Technical information

Optic	36 degrees reflector
Colour	Grey, blind plate anodised
Input (VAC)	220 - 240 VAC
Colour Rendering Index (CRI)	>80 (>90 on demand)
UGR	<16
Colour temperature	3,000 / 4,000 K
Length blind plate	Single 620 mm, double 750 mm
Colour consistency (SDCM)	3
Dimmable	Optional (DALI)
Impact resistance	IK02
Built-in driver	Yes, in aluminum profile
Life span	L80B50 at 50,000 hours
Warranty	5 years


### Versions

Veko Focus Spot	Built-in (mm)	Wattage (W)	Output flux (lm)	Lumen/Watt
PDNA-Spot-Fo-Single.830.36F	620	35	3.000	85
PDNA-Spot-Fo-Single.830.36Dd	620	35	3.000	85
PDNA-Spot-Fo-Single.840.36F	620	35	3.200	92
PDNA-Spot-Fo-Single.840.36Dd	620	35	3.200	92
PDNA-Spot-Fo-Double.830.36F	750	2x35	2x3.000	2x85
PDNA-Spot-Fo-Double.830.36Dd	750	2x35	2x3.000	2x85
PDNA-Spot-Fo-Double.840.36F	750	2x35	2x3.200	2x92
PDNA-Spot-Fo-Double.840.36Dd	750	2x35	2x3.200	2x92

### Measurements

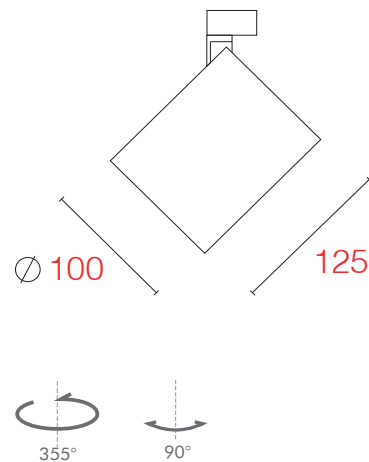

### Polar diagram

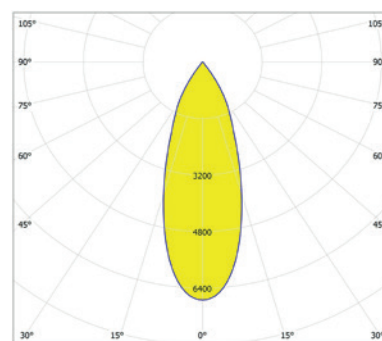

Technical data subject to change.

A Fagerhult Group Company

CLEVER  
SWIFT  
SOLID

Office lighting - EN v1.0 01/01/21

veko.com