



The Veko Highlight Spot is ideal for accent lighting in retail and office projects. The spotlight is fully integrated in the light line and is a nice addition to the Duncan retail line.

The Veko Highlight Spot has an appearance of 60 degrees and provides a wider and more general accent. It can be mounted single or double on a blind panel. Ideal to highlight a logo on a wall or a larger area.




Technical information

Optic	60 degrees reflector
Colour	Grey, blind plate anodised
Input (VAC)	220 - 240 VAC
Colour Rendering Index (CRI)	>80 (>90 on demand)
UGR	<16
Colour temperature	3,000 / 4,000 K
Length blind plate	Single 620 mm, double 750 mm
Colour consistency (SDCM)	3
Dimmable	Optional (DALI)
Impact resistance	IK02
Built-in driver	Yes, in aluminum profile
Life span	L80B50 at 50,000 hours
Warranty	5 years


Versions

Veko Highlight Spot	Built-in (mm)	Wattage (W)	Output flux (lm)	Lumen/Watt
PDNA-Spot-Hi-Single.830.60F	620	35	3.200	92
PDNA-Spot-Hi-Single.830.60Dd	620	35	3.200	92
PDNA-Spot-Hi-Single.840.60F	620	35	3.500	100
PDNA-Spot-Hi-Single.840.60Dd	620	35	3.500	100
PDNA-Spot-Hi-Double.830.60F	750	2x35	2x3.200	2x92
PDNA-Spot-Hi-Double.830.60Dd	750	2x35	2x3.200	2x92
PDNA-Spot-Hi-Double.840.60F	750	2x35	2x3.500	2x100
PDNA-Spot-Hi-Double.840.60Dd	750	2x35	2x3.500	2x100

Measurements

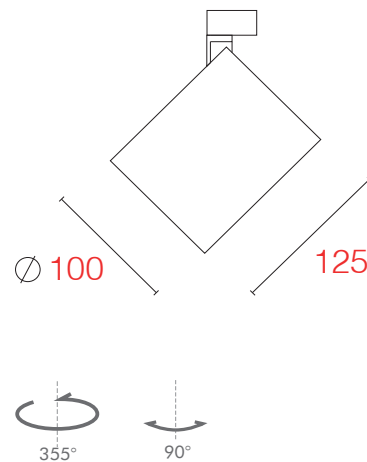

Polar diagram

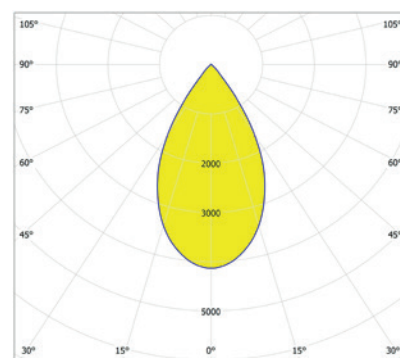

Technical data subject to change.

A Fagerhult Group Company

**CLEVER
SWIFT
SOLID**

Office lighting - EN v1.0.01/08/2022

veko.com